

808nm~810nm&976nm~980nm&650nm (or 660nm) Tri-Wavelength Fiber Coupled Laser Diode Module
4W@980nm&4W@808nm&2mw@650nm | <400um Fiber Core | With PD| TEC Cooling| Aiming Beam| LD
Wavespectrum Laser Group www.wavespectrum-laser.com


PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10 ~ +30	°C
Storage Temperature	T_{stg}	-20 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features:

- 808nm & 980nm & 650nm Tri-wavelength Output
- TEC Cooling Optional
- Photodiodes Optional
- Blue Aiming Beam Optional
- Customized Wavelength and Power Optional

Applications:

- Medical laser treatment
- Others

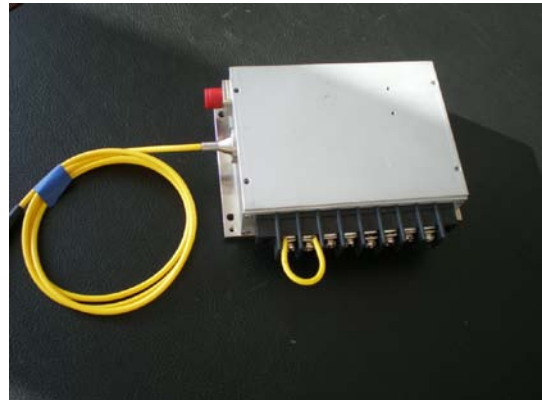


Specifications

WSLB-808/004-980/004-H-A

	Wavelength-1	Wavelength-2
Center Wavelength	808nm	980nm
Output Power (CW)	4W	4W
Threshold Current (Typ.)	0.85A	0.65A
Operating Current (Typ.)	5.2A	5.5A
Operating Voltage	2.1V	2.3V
Aiming Beam	2mw@650nm	
	635nm,405nm, 445nm as Aiming Beam Optional	
TEC Cooling	Optional	
Thermistor (10K)	Optional	
Photodiodes	Optional	
Fiber Core Diameter	<300um	
Stainless Steel Armored Fiber Jacket	Optional	
Fiber Length	100cm	
Connector Type	FC/SMA905	
Package	P2	



Package View

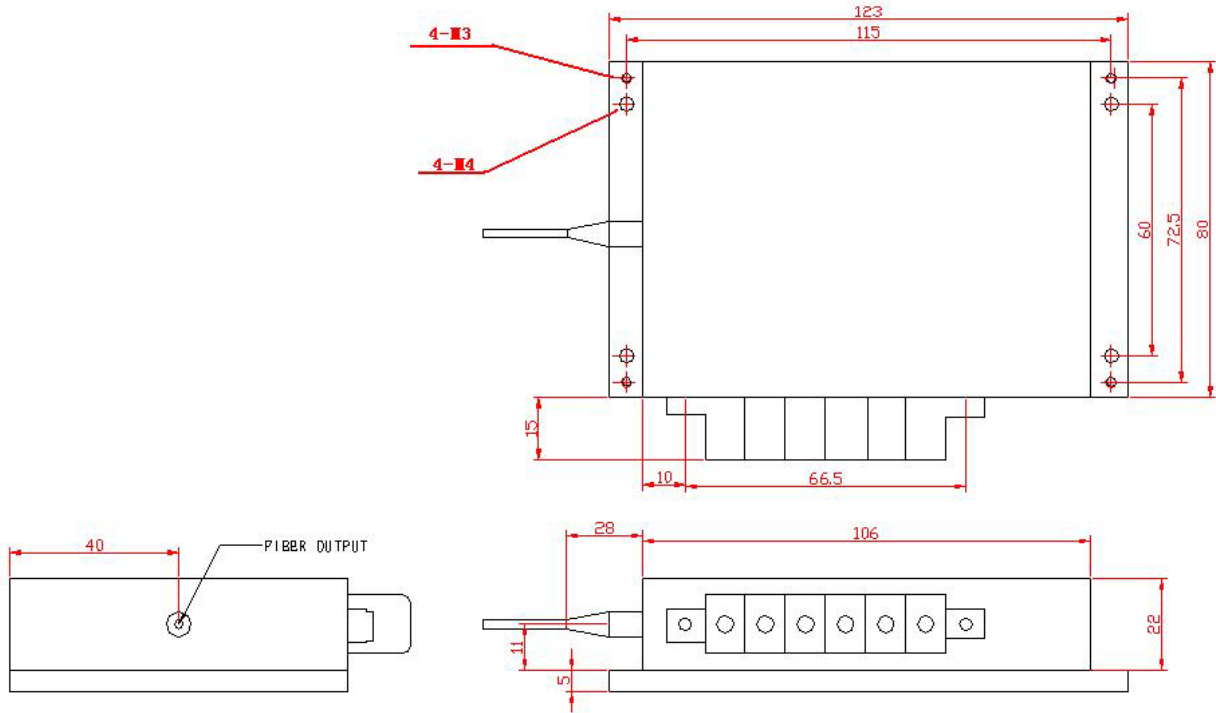

PIN	1	2	3	4	5	6
	LD1 (+)	LD1 (-)	LD2 (+)	LD2 (-)	Red (+)	Red (-)

Wavespectrum offer Customized 808nm & 980nm & 650nm Tri-Wavelength Module.

- Customized Output Power (Such as 12W@808nm & 12W@980nm & 2mW@650nm)
- Blue Aiming Beam Optional (Such as 4W@808nm & 4W@980nm & 2mW@405nm)
- Built-in Photodiodes and TEC Cooler Optional
- High Power Red Laser Optional (Such as 4W@808nm & 4W@980nm & 750mW@650nm)
- Fiber Detachable Package Optional

Contact us with info@wavespectrum-laser.com

Caution
 On operation, if optical connectors are unterminated, modules can emit invisible laser radiation. Radiation emitted by laser devices can be dangerous to the eyes. Avoided eye or skin exposure to direct or scattered radiation



Wavespectrum Laser, Inc.
 www.wavespectrum-laser.com
 wavespectrumlaser@gmail.com

