


1310nm 1W Laser Diode with C mount package | FAC Lens | High Power LD
1310nm~1320nm| 1W Power |C-mount Package | Square or Line Beam Optional

WSLD-1310-001-C


Wavespectrum Laser Group

www.wavespectrum-laser.com

1310nm Laser Diode 1W		Wavespectrum Laser Group	
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10~+30	°C
Storage Temperature	T_{stg}	-20 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features: <ul style="list-style-type: none"> 1310nm 1W Power C-mount Package FAC Lens Optional (Square or Line Beam) 			
Applications: <ul style="list-style-type: none"> Medical laser treatment Others 			
Specifications		WSLD-1310-001-C	
		Min	Type
Center Wavelength@25°C		----	1310nm
Spectral Width (FWHM)		----	10.0nm
Output Power		----	1W
Emitter Area		----	85x1µm
Beam Divergence (With FAC Lens)		----	8° _⊥ x 8° _{//}
Temperature Coefficient of Wavelength		----	0.7nm / °C
Slope Efficiency		----	0.5W/A
Threshold Current (Typ.)		----	350mA
Operating Current (Typ.)		----	2.1A
Operating Voltage		----	1.3V
Package Style		C-mount	



C-mount Package View

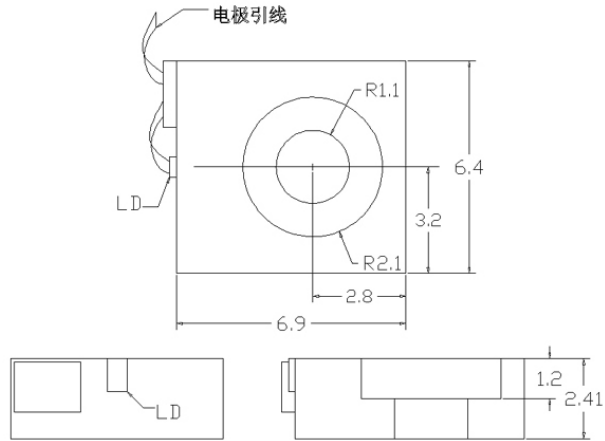

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

