



**880nm 1W Fiber Coupled Laser Diode with Butterfly (BTF) Package | Built-in TEC cooler | With Photodiode**  
**880nm 1W Pigtailed Diode Laser Module With 14-Pin Butterfly Package | Infrared LD Module**  
**WSLX-880-001-H-T-PD**      **Wavespectrum Laser Group**      **www.wavespectrum-laser.com**

880nm Pigtailed Diode Laser		1W/MM Fiber		en.wavespectrum-laser.com.cn	
PARAMETER	SYMBOL	VALUE	UNIT		
Reverse Voltage	$V_r$	2.0	V		
Operating Temperature	$T_{op}$	+10~+30	°C		
Storage Temperature	$T_{stg}$	-20~+80	°C		
Lead soldering temperature (5 sec.)	$T_{is}$	250	°C		
<b>Features:</b> <ul style="list-style-type: none"> <li>● 880nm</li> <li>● 14-Pin Butterfly Package</li> <li>● Built-in TEC Cooler</li> <li>● Built-in Photodiode</li> </ul>					
<b>Applications:</b> <ul style="list-style-type: none"> <li>● Medical Laser Treatment</li> <li>● Sensor</li> <li>● Others</li> </ul>					
<b>Specifications</b>	<b>WSLX-880-001-H-T-PD</b>				
	Min	Type	Max		
Center Wavelength@25°C	±3nm	880nm	±10nm		
Output Power		1W			
Spectral Width (FWHM)		2nm			
Recommend Operating Temperature	25°C				
Temperature Coefficient of Wavelength	0.3nm / °C				
Threshold Current (Typ.)	0.4A				
Operating Current (Typ.)	1.5A				
Operating Voltage	1.9V				
TEC Max Current	1.8A				
TEC Max Voltage	2.5V				
Thermistor	10K				
Fiber Core	105um				
N.A.	0.22				
Fiber Connector	FC/SMA905				
Fiber Length	80cm				
Package Style	14-Pin				

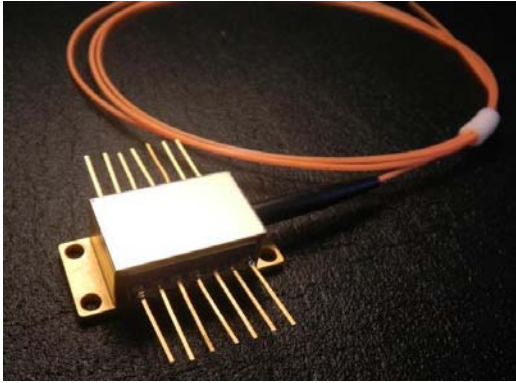

### 14-Pin Package View

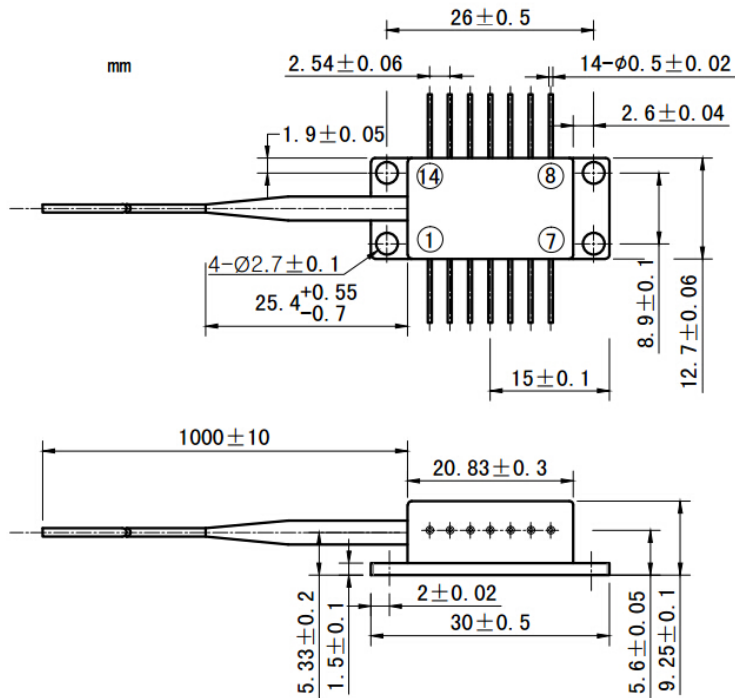

### Pin Out:

PIN	FUNCTION	PIN	FUNCTION
1	TEC(+)	14	TEC(-)
2	NC	13	NC
3	NC	12	NC
4	LD(+)	11	LD(-)
5	NC	10	Thermistor
6	PD(+)	9	Thermistor
7	PD(-)	8	NC

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

