

405nm Pigtailed Diode Laser


60mW/MM Fiber

en.wavespectrum-laser.com.cn


PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	0 ~ +70	°C
Storage Temperature	T_{stg}	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	T_{ls}	260	°C
Features:			
Applications:	<ul style="list-style-type: none"> • Medical laser treatment • Printing • Others 		
Specifications	WSLP-405-060m-105M		
	Min	Type	Max
Center Wavelength@25°C	400nm	405nm	410nm
Spectral Width (FWHM)	----	2.0nm	----
Output Power	50mW	60mW	----
Fiber Type	UV Multi-mode Fiber		
Fiber Core	105um		
Recommend Operating Temperature	25°C		
Fiber Connector	FC/SC/SMA905		
Fiber Length	----	80cm	100cm
Threshold Current (Typ.)	----	35mA	55mA
Operating Current (Typ.)	----	140mA	160mA
Operating Voltage	----	5.0V	6.0V
Package Style	Coaxial		



Coaxial Package View

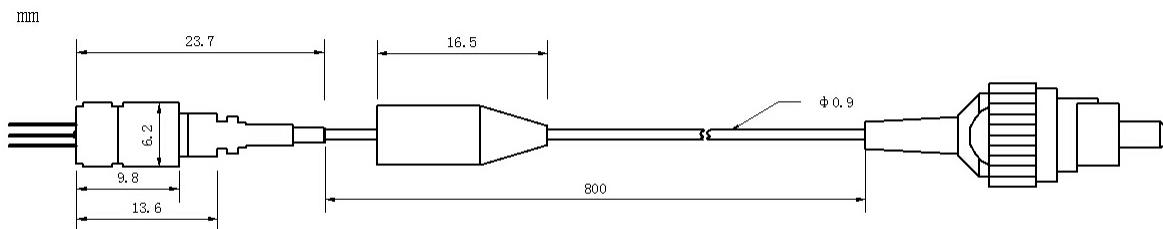

PIN Bottom View:



1	LD(+)
2	GND
3	LD(-)

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

