

1550nm 600mw~700mw Fiber Coupled Diode Laser Module | Photodiode Optional |Aiming Beam
1550nm|9-PIN HHL Package| 105um 200um 400um Fiber Core| High Power LD| TEC Cooling
WSLX-1550-650m-H-T
Wavespectrum Laser Group
www.wavespectrum-laser.com

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+15 ~ +35	°C
Storage Temperature	T_{stg}	-40 ~ +60	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features:

- 1550nm
- 9-pin package
- Built-in TEC Cooling
- PD Optional
- Aiming Beam Optional

Applications:


- Medical laser treatment
- Others


Specifications
WSLX-1550-650m-H-T

	Mini	Type	Max
Center Wavelength@25°C	----	1550±20nm	----
Spectral Width (FWHM)	----	4nm	----
Output Power	600mW	----	650mW
Temperature Coefficient of Wavelength	----	0.28nm / °C	----
Threshold Current (Typ.)	----	350mA	----
Operating Current (Typ.)	----	3A	----
Operating Voltage	----	1.3V	----
Recommended Case Temperature	----	25°C	----
TEC Max. Current	----	4A	----
TEC Max. Voltage	----	9.8V	----
Fiber Core Diameter	200um (105um 400um Optional)		
Fiber Numerical Aperture	0.22 (0.37N.A. Optional)		
Fiber Length	80cm		
Connector Type	SMA905/ST/FC		
Package Style	9-pin HHL		
Aiming Beam	Optional		



9-pin Package View

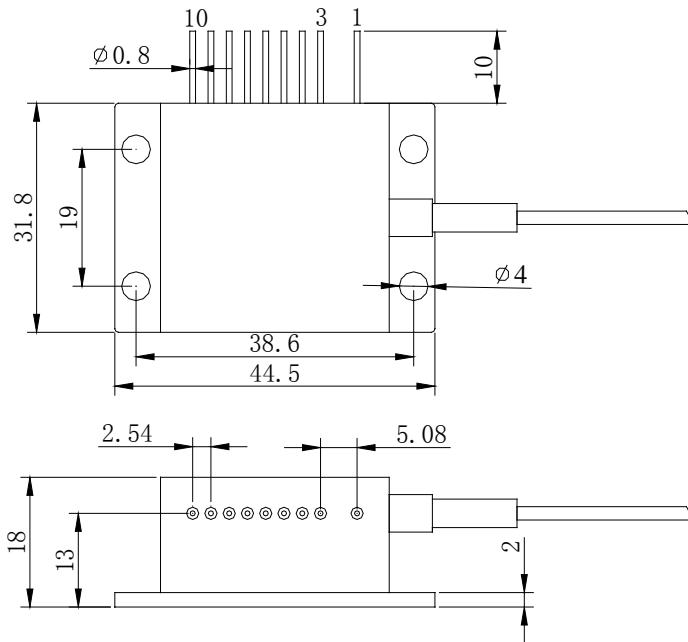

PIN	FUNCTION	PIN	FUNCTION
1	TEC (-)	6	THERM
2	-	7	LD (-)
3	CASE	8	PD (P)
4	LD (+)	9	PD (N)
5	THERM	10	TEC (+)

Wavespectrum offer **Customized 1550nm Fiber Coupled LD.**

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional
(such as 2w@1550nm+350mw@635nm)

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.



Wavespectrum Laser, Inc.
www.wavespectrum-laser.com
wavespectrumlaser@gmail.com

