
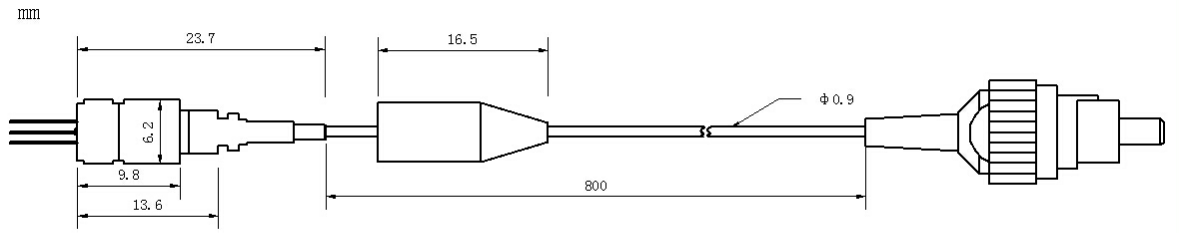


705nm 20mW~30mW SM Pigtailed Laser diode with PMF | Single Mode Laser Diode Module| With PD
 700nm~705nm~710nm SM Fiber Coupled LD with Polarization Maintaining Fiber (PM Fiber) | Photodiode
 WSLP-705-030m-PM-PD Wavespectrum Laser Group www.wavespectrum-laser.com


705nm Pigtailed Diode Laser		30mW/PM Fiber		Wavespectrum Laser Group	
PARAMETER	SYMBOL	VALUE	UNIT		
Reverse Voltage	V_r	2.0	V		
Operating Temperature	T_{op}	-10~+60	°C		
Storage Temperature	T_{stg}	-40~+85	°C		
Lead soldering temperature (10 sec.)	T_{is}	260	°C		
Features: <ul style="list-style-type: none"> ● 705nm ● With PM Fiber ● Coaxial Package ● Built-in PD 					
Applications: <ul style="list-style-type: none"> ● Medical Laser Treatment ● Others 					
Specifications	WSLP-705-030m-PM-PD				
	Min	Type	Max		
Center Wavelength@25°C	$\pm 3nm$	705nm	$\pm 10nm$		
Recommend Operating Temperature	25°C				
Output Power	20mW	30mW	----		
Fiber Type	Polarization Maintaining Fiber				
Fiber Core	4um				
Monitor Current	----	0.5mA	----		
PD Reverse Voltage	----	30V	----		
Fiber Connector	FC/SC/SMA905				
Fiber Length	----	80cm	100cm		
Threshold Current (Typ.)	----	35mA	60mA		
Operating Current (Typ.)	----	80mA	100mA		
Operating Voltage	----	2.5V	3.0V		
Package Style	Coaxial				
PD	Built-in				



Coaxial Package View



PIN Bottom View:



1	LD(-)
2	LD(+) & PD(-)
3	PD(+)

Electrically shorten LD module and store in non-extreme conditions.
 Suggest using the constant current power supply.

