


1064nm |3W~4W Output Power | Fiber Detachable LD Module | TEC Cooling Optional
1060nm~1064nm | 4W Power| Fiber Receptacle Laser Diode|200um 400um 600um MM Fiber
WSLR-1064-004-H **Wavespectrum Laser Group** **www.wavespectrum-laser.com**

1064nm Fiber Detachable Diode Laser		Wavespectrum Laser Group	
PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	0 ~ +30	°C
Storage Temperature	T_{stg}	-40 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features: <ul style="list-style-type: none"> • 1064nm • Fiber Detachable Package • TEC Cooling Optional • Aiming beam Optional 			
Applications: <ul style="list-style-type: none"> • Medical laser treatment • Others 			
Specifications	WSLR-1064-004-H		
	Min	Type	Max
Center Wavelength@25°C	+/-5nm	1064nm	+/-15nm
Spectral Width (FWHM)	----	3.0nm	6.0nm
Output Power(After Fiber End)	----	3.5W	4W
Used Fiber Type	200um(105um ,400um, 800um Optional)		
Recommended Operating Temperature	25°C		
Detachable Fiber Connector	FC or SMA905		
Threshold Current (Typ.)	----	0.5A	0.65A
Operating Current (Typ.)	----	6.5A	7.0A
Operating Voltage	----	1.9V	2.2V
Package Style	HHL		
Built-in TE Cooling	Optional		
Aiming Beam	Red / Blue /Green Aiming Optional		



Wavespectrum Laser, Inc.
www.wavespectrum-laser.com
wavespectrumlaser@gmail.com

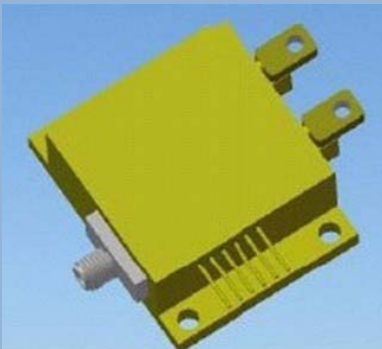