


**445nm-450nm 10mw~15mw Coaxial Pigtailed Laser Diode with SMF | Blue Laser Module**
**445nm | Blue Laser Diode | SM Fiber Coupled LD | 3um Single Mode Fiber (SM Fiber)**
**WSLP-445-015m-4**
**Wavespectrum Laser Group**
**[www.wavespectrum-laser.com](http://www.wavespectrum-laser.com)**
**445nm Pigtailed Diode Laser 15mw**
**Wavespectrum Laser Group**


PARAMETER	SYMBOL	VALUE		UNIT		
Reverse Voltage	V <sub>r</sub>	2.0		V		
Operating Temperature	T <sub>op</sub>	+10 ~ +70		°C		
Storage Temperature	T <sub>stg</sub>	-40 ~ +85		°C		
Lead soldering temperature (10 sec.)	T <sub>ls</sub>	260		°C		
<b>Features:</b>	<ul style="list-style-type: none"> <li>● 445nm</li> <li>● UV 3um SM Fiber</li> <li>● Coaxial Package</li> </ul>					
<b>Applications:</b>	<ul style="list-style-type: none"> <li>● Medical Laser Treatment</li> <li>● Printing</li> <li>● Others</li> </ul>					
<b>Specifications</b>	<b>WSLP-445-015m-4</b>					
	Min	Type	Max			
Center Wavelength@25°C	440nm	445nm	460nm			
Spectral Width (FWHM)	----	2.0nm	----			
Output Power	10mW	15mW	----			
Fiber Core	3um					
Recommend Operating Temperature	25°C					
Monitor Current	----	----	----			
PD Reverse Voltage	----	----	----			
Fiber Connector	FC					
Fiber Length	----	80cm	100cm			
Threshold Current (Typ.)	----	30mA	50mA			
Operating Current (Typ.)	----	140mA	160mA			
Operating Voltage	----	5.8V	6.5V			
Package Style	Coaxial					



## Coaxial Package View

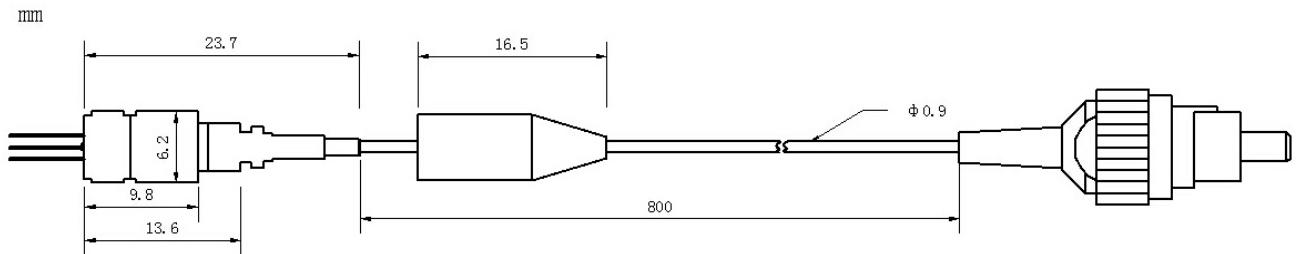

## PIN Bottom View:

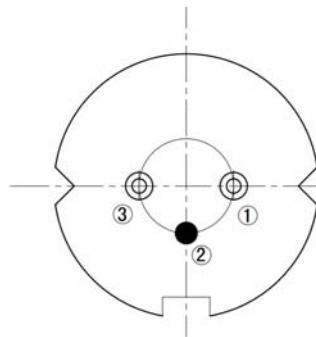

<b>1</b>	<b>LD(+)</b>
<b>2</b>	<b>GND</b>
<b>3</b>	<b>LD(-)</b>

**Electrically shorten LD module and store in non-extreme conditions.**

Suggest using the constant current power supply.

