



650nm 10mW Single Mode Butterfly (BTF) Package Pigtailed Laser Diode with PD | Built-in TEC cooler
658nm~660nm 10mW SM Fiber Coupled LD with 14-Pin Package | Red Laser Module With Photodiode
WSLX-650-010m-4-H14-T-PD **Wavespectrum Laser Group** **www.wavespectrum-laser.com**

650nm Pigtailed Diode Laser		10mW/SM Fiber		en.wavespectrum-laser.com.cn	
PARAMETER	SYMBOL	VALUE		UNIT	
Reverse Voltage	V_r	2.0		V	
Operating Temperature	T_{op}	-10~+60		°C	
Storage Temperature	T_{stg}	-40~+80		°C	
Lead soldering temperature (10 sec.)	T_{is}	260		°C	
Features: <ul style="list-style-type: none"> ● 650nm ● With SM Fiber ● 14-Pin Package ● Built-in TEC Cooler 					
Applications: <ul style="list-style-type: none"> ● Medical Laser Treatment ● Sensor ● Others 					
Specifications		WSLX-650-010m-4-H14-T-PD			
		Min	Type	Max	
Center Wavelength@25°C		650nm	658nm	670nm	
Recommended Operating Temperature		25°C			
Output Power		----	10mW	----	
Fiber Type		Single Mode Fiber			
Fiber Core		4um			
Threshold Current (Typ.)		----	40mA	60mA	
Operating Current (Typ.)		----	85mA	100mA	
Operating Voltage		----	2.6V	3.0V	
TEC Max Current		1.0A			
TEC Max Voltage		3.0V			
Thermistor		10K			
Fiber Connector		FC/SMA905			
Fiber Length		80cm			
Package Style		14-Pin			

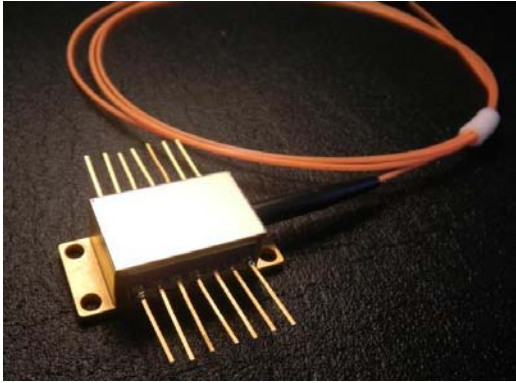

14-Pin Package View

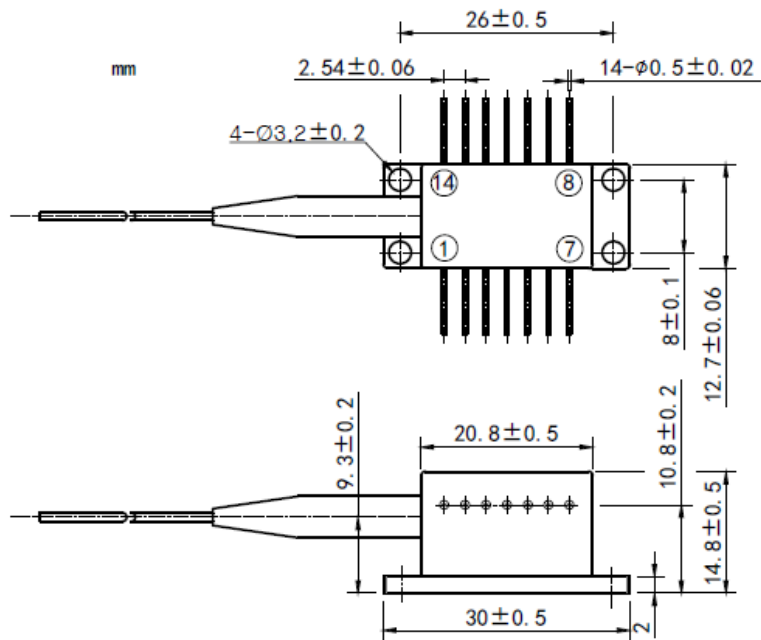

Pin Out:

PIN	FUNCTION	PIN	FUNCTION
1	TEC (+)	14	TEC (-)
2	Thermistor	13	CASE
3	PD (+)	12	NC
4	NC	11	LD (-)
5	Thermistor	10	LD (+) & PD (-)
6	NC	9	NC
7	NC	8	NC

Electrically shorten LD module and store in non-extreme conditions.
 Suggest using the constant current power supply.

