


915nm 高輝度ファイバカップル レーザモジュール

Applications

- ファイバーレーザー励起
- 材料加工：硬化／クラディング／溶接
- 医療／美容

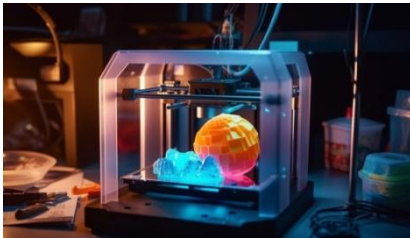

10W Fiber-coupled Laser Module



CW Output Power (min)	10W
Slop Efficiency (typ.)	1.0 W/A
Electrical-to-Optical Efficiency (min)	56%
Center Wavelength	915nm
Spectral Width (FWHM) (typ.)	3nm
Wavelength Shift with Temperature (typ.)	0.3 nm/° C
Lop	10.5 Amp

30W Fiber-coupled Laser Module



CW Output Power (min)	30W
Slop Efficiency (typ.)	2.8 W/A
Electrical-to-Optical Efficiency (min)	50%
Center Wavelength	915nm
Spectral Width (FWHM) (typ.)	4nm
Wavelength Shift with Temperature (typ.)	0.3 nm/° C
Lop	11.5 Amp

140W Fiber-coupled Laser Module



CW Output Power (min)	140W
Slop Efficiency (typ.)	12 W/A
Electrical-to-Optical Efficiency (min)	48%
Center Wavelength	915nm
Spectral Width (FWHM) (typ.)	6nm
Wavelength Shift with Temperature (typ.)	0.3 nm/° C
Lop	12.5 Amp