


**1470nm 1W LD| TO Can Laser Diode**
**1470nm 1w Laser Diodes| High power |TO3 Package**
**WSLD-1470-001-3**
**Wavespectrum laser inc.**
**[www.wavespectrum-laser.com](http://www.wavespectrum-laser.com)**

<b>1470nm Laser Diode 1W</b>		<b>Wavespectrum Laser, Inc</b>	
<b>Reverse Voltage</b>	<b>V<sub>r</sub></b>	<b>2.0</b>	<b>V</b>
<b>Operating Temperature</b>	<b>T<sub>op</sub></b>	<b>+15~+35</b>	<b>°C</b>
<b>Storage Temperature</b>	<b>T<sub>stg</sub></b>	<b>-40 ~ +60</b>	<b>°C</b>
<b>Lead soldering temperature (10 sec.)</b>	<b>T<sub>is</sub></b>	<b>260</b>	<b>°C</b>
<b>Features:</b>	<ul style="list-style-type: none"> <li>● 1470nm</li> <li>● 1W Power</li> <li>● TO3 package</li> </ul>		
<b>Applications:</b>	<ul style="list-style-type: none"> <li>● Medical laser treatment</li> <li>● Others</li> </ul>		
<b>Specifications</b>	<b>WSLD-1470-001-3</b>		
	<b>Min</b>	<b>Type</b>	<b>Max</b>
<b>Center Wavelength@25°C</b>	<b>+/-10nm</b>	<b>1470nm</b>	<b>+/-20nm</b>
<b>Spectral Width (FWHM)</b>	<b>---</b>	<b>3.0nm</b>	<b>---</b>
<b>Output Power</b>	<b>---</b>	<b>1W</b>	<b>---</b>
<b>Emitter Area</b>	<b>---</b>	<b>100x1μm</b>	<b>---</b>
<b>Beam Divergence (FWHM)</b>	<b>---</b>	<b>70°<sub>±</sub> x 10°<sub>//</sub></b>	<b>---</b>
<b>Temperature Coefficient of Wavelength</b>	<b>---</b>	<b>0.3nm / °C</b>	<b>---</b>
<b>Slope Efficiency</b>	<b>---</b>	<b>0.3mW/mA</b>	<b>---</b>
<b>Threshold Current (Typ.)</b>	<b>---</b>	<b>400mA</b>	<b>---</b>
<b>Operating Current (Typ.)</b>	<b>---</b>	<b>3A</b>	<b>3.2A</b>
<b>Operating Voltage</b>	<b>---</b>	<b>1.2V</b>	<b>1.3V</b>
<b>Package Style</b>	<b>TO3</b>		



### TO3 Package View

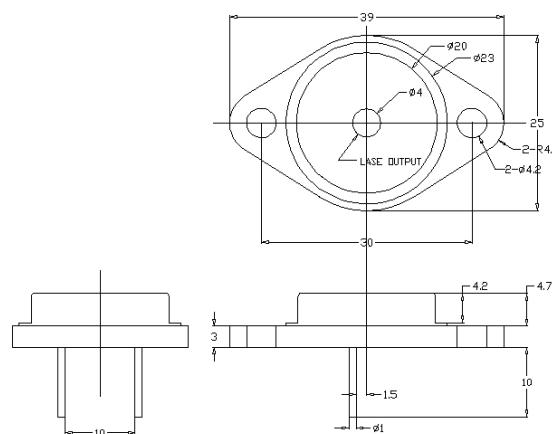

**Electrically shorten LD module and store in non-extreme conditions.**

**Suggest using the constant current power supply.**

