Http://www.gigalight.com.cn

10G SFP+ AOC

Features

- Electrical interface compliant to SFF-8431
- Hot Pluggable
- 850nm VCSEL transmitter, PIN photo-detector receiver
- Up to 300m on OM3 MMF
- Operating case temperature: 0 to 70°C
- All-metal housing for superior EMI performance
- RoHS compliant (lead free)



Applications

- 10 Gigabit Ethernet
- 4G and 8G Fibre Channel Applications
- 1x InfiniBand QDR. DDR, SDR
- High-performance computing clusters
- Servers, switches, storage and host card adapters

Description

Gigalight SFP+ Active Optical Cables are direct-attach fiber assemblies with SFP+ connectors. They are suitable for very short distances and offer a cost-effective way to connect within racks and across adjacent racks. Gigalight SFP+ Active Optical Cables's length is up to 300 meters on OM3 MMF.

Absolute Maximum Ratings

Table 1 - Absolute Maximum Ratings

Table 1 - Absolute Maximum Natings				
Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	0	3.6	V
Storage Temperature	Ts	-40	+85	°C
Operating Humidity	-	5	85	%

SFP+ AOC Specifications

Parameter	Description
. aramoto.	2000





Http://www.gigalight.com.cn

Optical Network Transceiver Innovator

Module Form Factor	SFP+ (Supports SFF8431/SFF8432/SFF8472)
Protocols Supported	InfiniBand, Ethernet, Fiber Channel
Channel Data Rate	Rate 1 to 10.3125Gbps
BER	<10 ⁻¹²
Operating Case Temperature	0 to + 70°C
Storage Temperature	-20 to + 85°C
Supply Voltage	3.3V
Supply current	230mA per end typical
Management Interface Serial	I ² C (Supports SFF8472)

Optical characteristics

The following optical characteristics are defined over the Recommended Operating Environment unless otherwise specified

Parameter	Symbol	Min.	Typical	Max	Unit	Notes
Transmitter						
Center Wavelength	λt	840	850	860	nm	
RMS spectral width	Pm	-	-	Note 1	nm	
Average Optical Power	Pavg	-6.5	-	-1	dBm	2
Extinction Ratio	ER	3.5	-	-	dB	3
Transmitter Dispersion Penalty	TDP	-	-	3.9	dB	
Relative Intensity Noise	Rin	-	-	-128	dB/Hz	12dB reflection
Optical Return Loss Tolerance		~	-	12	dB	
Receiver						
Center Wavelength	λr	840	850	860	nm	
Receiver Sensitivity	Psens	-	-	-11.1	dBm	4
Stressed Sensitivity in OMA		-	-	-7.5	dBm	4
Los function	Los	-30	-	-12	dBm	
Overload	Pin	-	-	-1.0	dBm	4
Receiver Reflectance		-	-	-12	dB	

- 1. Trade-offs are available between spectral width, center wavelength and minimum OMA, as shown in table 6.
- 2. The optical power is launched into MMF
- 3. Measured with a PRBS 2³¹-1 test pattern @10.3125Gbps 4.Measured with a PRBS 2³¹-1 test pattern @10.3125Gbps,BER \leqslant 10⁻¹².



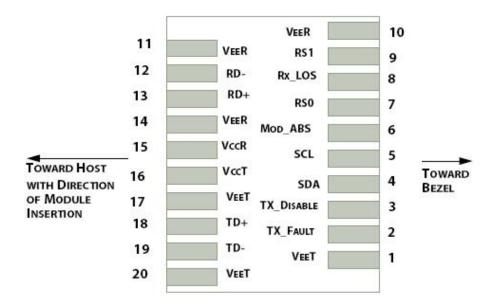


Figure 1: Interface to Host PCB

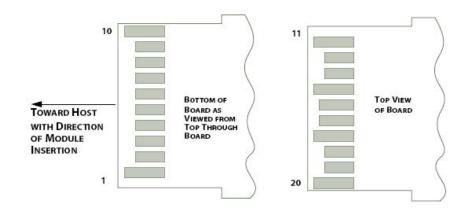


Figure 2: Module Contact Assignment

Pin definition

Pin	Symbol	Name/Description	
1	VEET [1]	Transmitter Ground	
2	Tx_FAULT [2]	Transmitter Fault	
3	Tx_DIS [3]	Transmitter Disable. Laser output disabled on high or open	
4	SDA [2]	2-wire Serial Interface Data Line	
5	SCL [2]	2-wire Serial Interface Clock Line	
6	MOD_ABS [4]	Module Absent. Grounded within the module	



Http://www.gigalight.com.cn

Optical Network Transceiver Innovator

7	RS0 [5]	Rate Select 0	
8	RX_LOS [2]	Loss of Signal indication. Logic 0 indicates normal operation	
9	RS1 [5]	Rate Select 1	
10	VEER [1]	Receiver Ground	
11	VEER [1]	Receiver Ground	
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver DATA out. AC Coupled	
14	VEER [1]	Receiver Ground	
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET [1]	Transmitter Ground	
18	TD+	Transmitter DATA in. AC Coupled	
19	TD-	Transmitter Inverted DATA in. AC Coupled	
20	VEET [1]	Transmitter Ground	

Notes

- [1] Module circuit ground is isolated from module chassis ground within the module.
- [2].should be pulled up with 4.7k 10k ohms on host board to a voltage between 3.15Vand 3.6V.
- [3]Tx_Disable is an input contact with a 4.7 k Ω to 10 k Ω pullup to VccT inside the module.
- [4]Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to Vcc_Host with a resistor in the range $4.7 \text{ k}\Omega$ to $10 \text{ k}\Omega$. Mod_ABS is asserted "High" when the SFP+ module is physically absent from a host slot.
- [5] RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 k Ω resistors in the module.

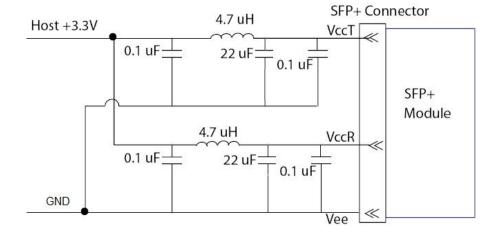


Figure 3. Host Board Power Supply Filters Circuit

Optical Network Transceiver Innovator



Http://www.gigalight.com.cn



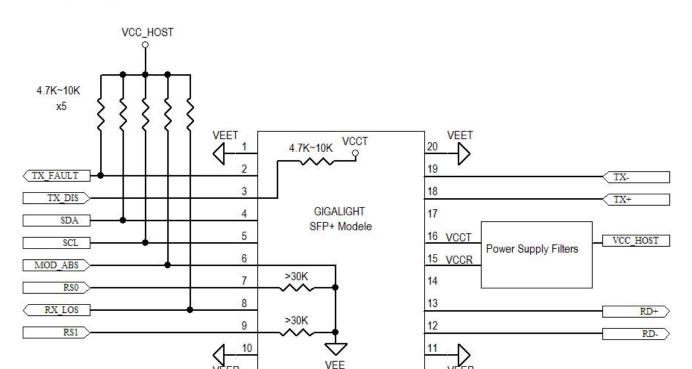


Figure 4. Host-Module Interface

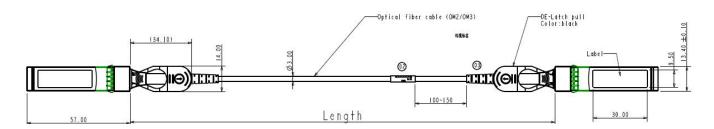

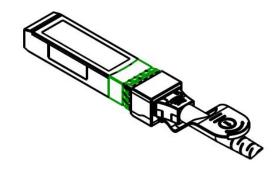

Optical Network Transceiver Innovator



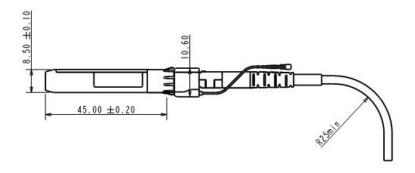


Figure 1. Mechanical Specifications

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by GIGALIGHT before they become applicable to any particular order or contract. In accordance with the GIGALIGHT policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of GIGALIGHT or others. Further details are available from any GIGALIGHT sales representative.

Ordering information

Ordering information				
Part Number	Product Description			
GSS-MDO100-001C	1 meter SFP+ Active Optical Cable			
GSS-MDO100-002C	2 meter SFP+ Active Optical Cable			
GSS-MDO100-003C	3 meter SFP+ Active Optical Cable			
GSS-MDO100-005C	5 meter SFP+ Active Optical Cable			
GSS-MDO100-007C	7 meter SFP+ Active Optical Cable			
GSS-MDO100-010C	10 meter SFP+ Active Optical Cable			
GSS-MDO100-0XXC	10G SFP+ Active Optical Cable up to 300m on OM3 MMF			
xxx :001~100,1~300 Length in meters (OM3 fiber is available)				

E-mail: sales@gigalight.com http://www.gigalight.com